


CLICK ON THE UNDERLINED BLUE TEXT FOR DETAILS ON THE PRODUCTS USED IN THIS APPLICATION

TEST CONDITIONS

Column: ACQUITY UPLC® BEH Amide,
2.1 x 150 mm, 1.7 µm
Part Number: [186004802](#)
Isocratic Mobile Phase B: 90/10 MeCN/H₂O
Flow Rate: 0.2 mL/min
Injection Volume: 5.0 µL (PLNO)
Sample Concentration: 100 µg/mL
Sample Diluent: 90/10 MeCN/H₂O
Column Temperature: 25 °C
Weak Needle Wash: 95/5 MeCN/H₂O
Detection: UV @ 210 nm
Sampling Rate: 20 points/sec
Filter Time Constant: 0.2
Instrument: Waters ACQUITY UPLC with
ACQUITY UPLC PDA Detector

STRUCTURE

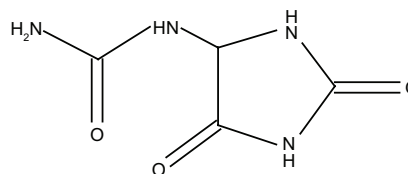

Allantoin

